QUICK SHIP PROGRAM GUIDE

LUMENWERX

Have a rush job? Need quality lighting sent pronto?

Not to worry, Lumenwerx has you covered! Rapid response is fundamental to everything we do: from integrating new lighting technologies, to product development, job site delivery and follow up. **Quick Ship is how we do business . . . without compromise.**
Featuring a broad range of popular and practical LED lighting products with versatile configurations, the new LumenXpress shipping program meets accelerated project timelines with **shipment in 10 business days from drawings approval.**

LumenXpress 10

LumenXpress is remarkably simple. In this brochure, you will find a wide variety of the LumenWerx portfolio, including all Via sizes, mounting, patterns, and light distributions; recessed troffers; direct/indirect pendants; perimeter and wall lighting.
LumenXpress covers all standard product options, including color temperature, light output, and emergency. Don't hesitate to call or email us at **lumenxpress@lumenwerx.com** if you have any questions.

Order requirements

- All orders must be emailed to **lumenxpress@lumenwerx.com**
- PO must clearly indicate LumenXpress.
- Max $50,000.
- Complete catalog number.
- PO and a formal quote # or price confirmation.
- Complete ship to address and contact information.
- Any shipping notes/site restrictions.

Terms and conditions

- Orders will be shipped 10 days from order release date.
- All orders received after 3:30pm EST will be processed the next business day.
- Changes of any kind will affect lead times.
- Cancellation after release will result in a 50% restocking fee.

May 2019

LumenXpress 10 - At a Glance

PRODUCT TYPE	PRODUCT NAME	MOUNTING						LIGHT DISTRIBUTION				ADA
		Recessed	Pendant	Wall	Surface	Cove	Perimeter	Direct	Indirect	Direct/Indirect	Patterns	
LINEAR RUNS	VIA 1.5	●	●	●	●			●	●	●	●	●
	VIA 1.5 PLUS	●	●	●	●			●				●
	VIA 2	●	●	●	●			●	●	●	●	●
	VIA 2 PLUS	●						●				
	VIA 3	●	●	●	●			●	●	●	●	●
	VIA 4	●	●	●	●			●	●	●	●	
	VIA 5	●	●	●	●			●	●		●	
	QUAD		●	●	●			●				
	CAVA	●						●				

PRODUCT TYPE	PRODUCT NAME	MOUNTING						LIGHT DISTRIBUTION				ADA
		Recessed	Pendant	Wall	Surface	Cove	Perimeter	Direct	Indirect	Direct/Indirect	Patterns	
DIRECT/INDIRECT	CANYON		●	●						●		●
	REVEN		●	●				●		●		
	CAMBER		●					●		●		
RECESSED	NOVA	●						●				
	VEGA	●						●				
	PRIMO	●						●				
	POP RECESSED	●						●				
RECESSED WALL	INWALO			●				●			●	●
	CUBITO	●		●								●
PENDANT	POP COLOR		●		●			●				
	POP CORE		●	●	●			●				
	TOGO		●		●			●				
PERIMETER & COVE	VIA PERIMETER						●	●				
	ALCOVE					●			●			
	ALCOVE RAMP					●						
	VIA SKIM	●						●			●	
WALL	WALO			●	●					●		●
	AXLE		●	●				●	●			
WET LOCATION	VIA WET	●	●	●	●			●				

VIA RECESSED

LUMENXPRESS
lumenxpress@lumenwerx.com

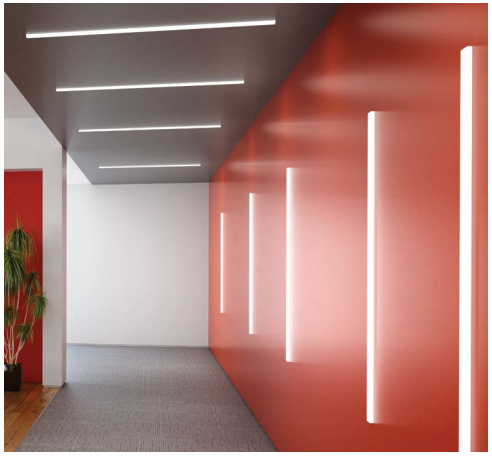

Via 1.5+ recessed DMF

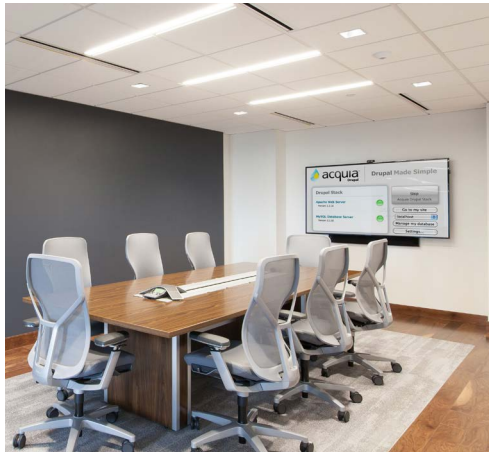

Via 5 recessed in a grid ceiling

Order Check list

1. Download spec sheet from www.lumenwerx.com.
2. Specify the product as per the information on this page.
3. PO must clearly indicate LumenXpress.
4. Send an email to lumenxpress@lumenwerx.com along with a PO and a formal quote # or price confirmation.

LENS POSITION	Flush & Regressed
LIGHT SOURCE	LED
CRI	80 CRI, 90 CRI
COLOR TEMP.	30k, 35k & 40k
LUMINAIRE LENGTH	Individual Units & Continuous Runs
VOLTAGE	120V, 277V & UNV
DRIVER	Dimming 0-10V, Lutron LDE1 & LDE5
ELECTRICAL	1 circuit +EB/EM
MOUNTING	TG, TB, ST, Trim, Trimless & Mud flange
FINISH	White
CONTROLS	Individual Daylight & Occupancy Sensors
OPTIONS	Fuse, Chicago Plenum, Flexible Whip Cable

LUMINAIRE ID



VIA1.5

VIA2

VIA3

VIA4



VIA1.5+



VIA2+



VIA5

The following options may require additional lead time: Asymmetric, Wall Wash, 347V, Other Lutron Drivers, Group Controls, COB & ChromaWerx.

VIA PENDANT DIRECT/INDIRECT

Via 2 pendant cable direct/indirect

LUMINAIRE ID			
VIA1.5	VIA2	VIA3	VIA4

Order Check list

1. Download spec sheet from www.lumenwerx.com.
2. Specify the product as per the information on this page.
3. PO must clearly indicate LumenXpress.
4. Send an email to lumenxpress@lumenwerx.com along with a PO and a formal quote # or price confirmation.

LIGHT SOURCE	LED
CRI	80 CRI, 90 CRI
COLOR TEMP.	30k, 35k & 40k
LUMINAIRE LENGTH	Individual Units & Continuous Runs
VOLTAGE	120V, 277V & UNV
DRIVER	Dimming 0-10V, Lutron LDE1 & LDE5
ELECTRICAL	1 circuit/2 circuits +EB/EM
MOUNTING	Pendant
FINISH	White
CONTROLS	Individual Daylight & Occupancy Sensors
OPTIONS	Fuse, Caddy clip

The following options may require additional lead time: Asymmetric, 347V, other Lutron drivers, Group Controls, Custom finish, Widespread Indirect Optics & ChromaWerx.

VIA PENDANT DIRECT

LUMENXPRESS
lumenxpress@lumenwerx.com

Via 2 pendant cable direct

Via 4 pendant stem direct

Order Check list

1. Download spec sheet from www.lumenwerx.com.
2. Specify the product as per the information on this page.
3. PO must clearly indicate LumenXpress.
4. Send an email to lumenxpress@lumenwerx.com along with a PO and a formal quote # or price confirmation.

LIGHT SOURCE	LED
CRI	80 CRI, 90 CRI
COLOR TEMP.	30k, 35k & 40k
LUMINAIRE LENGTH	Individual Units & Continuous Runs
VOLTAGE	120V, 277V & UNV
DRIVER	Dimming 0-10V, Lutron LDE1 & LDE5
ELECTRICAL	1 circuit +EB/EM
MOUNTING	Pendant
FINISH	White
CONTROLS	Individual Daylight & Occupancy Sensors
OPTIONS	Fuse, Caddy Clip

LUMINAIRE ID

VIA1.5

VIA2

VIA3

VIA4

VIA1.5+

VIA5

The following options may require additional lead time: Asymmetric, Other Lumen Output, 347V, Other Lutron Drivers, Group Controls, COB, Custom Finish & ChromaWerx.

VIA PENDANT INDIRECT

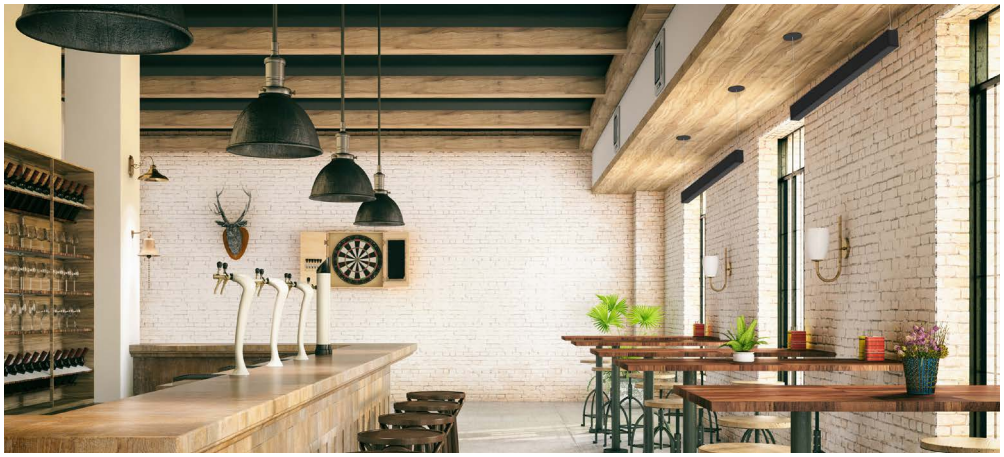

Via 2 pendant cable indirect

Order Check list

1. Download spec sheet from www.lumenwerx.com.
2. Specify the product as per the information on this page.
3. PO must clearly indicate LumenXpress.
4. Send an email to lumenxpress@lumenwerx.com along with a PO and a formal quote # or price confirmation.

LIGHT SOURCE	LED
CRI	80 CRI, 90CRI
COLOR TEMP.	30k, 35k & 40k
LUMINAIRE LENGTH	Individual Units & Continuous Runs
VOLTAGE	120V, 277V & UNV
DRIVER	Dimming 0-10V, Lutron LDE1 & LDE5
ELECTRICAL	1 circuit +EB/EM
MOUNTING	Pendant
FINISH	White
CONTROLS	Individual Daylight & Occupancy Sensors
OPTIONS	Fuse, Caddy Clip

LUMINAIRE ID

VIA1.5

VIA2



VIA3

VIA4

VIA5

The following options may require additional lead time: Asymmetric, 347V, Other Lutron Drivers, Group Controls, COB, Custom Finish, Widespread Indirect Optics & ChromaWerx.

VIA WALL DIRECT/INDIRECT

LUMENXPRESS
lumenxpress@lumenwerx.com

Via 1.5 wall direct/indirect

Order Check list

1. Download spec sheet from www.lumenwerx.com.
2. Specify the product as per the information on this page.
3. PO must clearly indicate LumenXpress.
4. Send an email to lumenxpress@lumenwerx.com along with a PO and a formal quote # or price confirmation.

LIGHT SOURCE	LED
CRI	80 CRI, 90CRI
COLOR TEMP.	30k, 35k & 40k
LUMINAIRE LENGTH	Individual Units & Continuous Runs
VOLTAGE	120V, 277V & UNV
DRIVER	Dimming 0-10V, Lutron LDE1 & LDE5
ELECTRICAL	1 circuit/2 circuits +EB/EM
MOUNTING	Drywall Mounting Bracket
FINISH	White
CONTROLS	Individual Daylight & Occupancy Sensors
OPTIONS	Fuse

LUMINAIRE ID

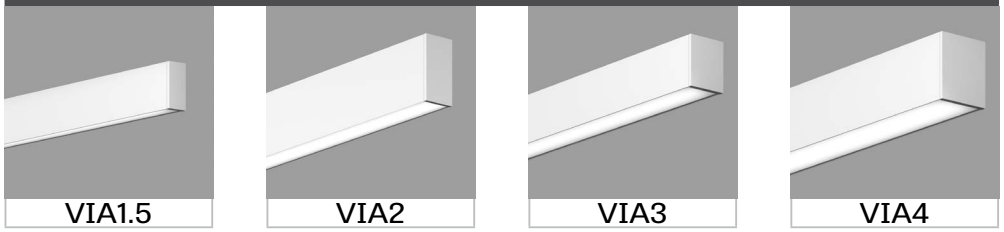

The following options may require additional lead time: Asymmetric, 347V, Other Lutron Drivers, Group Controls, Custom Finish & ChromaWerx.

VIA WALL DIRECT

Via 4 wall direct

Order Check list

1. Download spec sheet from www.lumenwerx.com.
2. Specify the product as per the information on this page.
3. PO must clearly indicate LumenXpress.
4. Send an email to lumenxpress@lumenwerx.com along with a PO and a formal quote # or price confirmation.

LIGHT SOURCE	LED
CRI	80 CRI, 90 CRI
COLOR TEMP.	30k, 35k & 40k
LUMINAIRE LENGTH	Individual Units & Continuous Runs
VOLTAGE	120V, 277V & UNV
DRIVER	Dimming 0-10V, Lutron LDE1 & LDE5
ELECTRICAL	1 circuit +EB/EM
MOUNTING	Drywall Mounting Bracket
FINISH	White
CONTROLS	Individual Daylight & Occupancy Sensors
OPTIONS	Fuse

LUMINAIRE ID

VIA1.5

VIA2

VIA3

VIA4

VIA1.5+

VIA5

The following options may require additional lead time: Asymmetric, Wall Wash, 347V, Other Lutron Drivers, Group Controls, Custom Finish & ChromaWerx.

VIA WALL INDIRECT

LUMENXPRESS
lumenxpress@lumenwerx.com

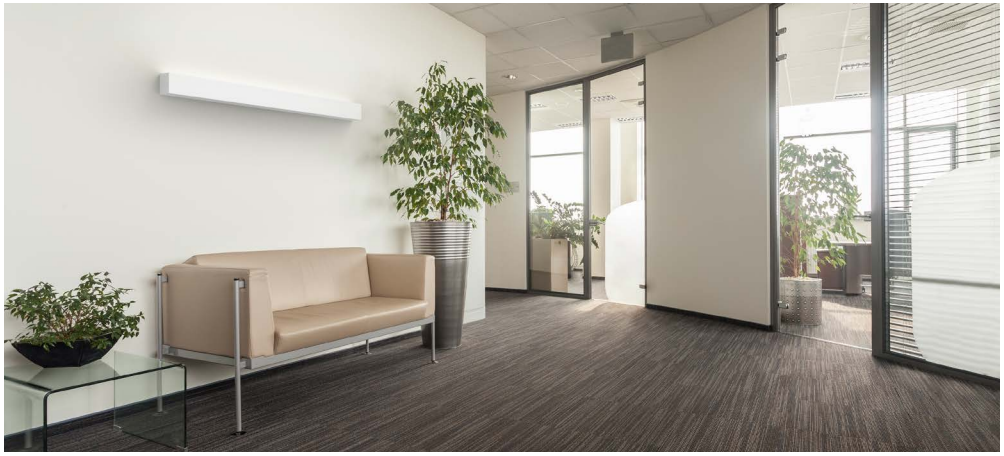

Via 4 wall indirect

Order Check list

1. Download spec sheet from www.lumenwerx.com.
2. Specify the product as per the information on this page.
3. PO must clearly indicate LumenXpress.
4. Send an email to lumenxpress@lumenwerx.com along with a PO and a formal quote # or price confirmation.

LIGHT SOURCE	LED
CRI	80 CRI, 90CRI
COLOR TEMP.	30k, 35k & 40k
LUMINAIRE LENGTH	Individual Units & Continuous Runs
VOLTAGE	120V, 277V & UNV
DRIVER	Dimming 0-10V, Lutron LDE1 & LDE5
ELECTRICAL	1 circuit +EB/EM
MOUNTING	Drywall Mounting Bracket
FINISH	White
CONTROLS	Individual Daylight & Occupancy Sensors
OPTIONS	Fuse

LUMINAIRE ID

VIA1.5

VIA2



VIA3



VIA4



VIA5

The following options may require additional lead time: Asymmetric, Wall Wash, 347V, Other Lutron drivers, Group Controls, Custom Finish & ChromaWerx.

VIA SURFACE

Via 1.5+ surface

LUMINAIRE ID			
VIA1.5	VIA2	 VIA3	 VIA4
VIA1.5+			 VIA5

Order Check list

1. Download spec sheet from www.lumenwerx.com.
2. Specify the product as per the information on this page.
3. PO must clearly indicate LumenXpress.
4. Send an email to lumenxpress@lumenwerx.com along with a PO and a formal quote # or price confirmation.

LIGHT SOURCE	LED
CRI	80 CRI, 90CRI
COLOR TEMP.	30k, 35k & 40k
LUMINAIRE LENGTH	Individual Units & Continuous Runs
VOLTAGE	120V, 277V & UNV
DRIVER	Dimming 0-10V, Lutron LDE1 & LDE5
ELECTRICAL	1 circuit +EB/EM
MOUNTING	Grid & Drywall Ceiling
FINISH	White
CONTROLS	Individual Daylight & Occupancy Sensors
OPTIONS	Fuse, Caddy Clip

The following options may require additional lead time: Asymmetric, 347V, Other Lutron Drivers, Group Controls, COB, Custom Finish & ChromaWerx.

VIA PATTERNS RECESSED

LUMENXPRESS
lumenxpress@lumenwerx.com

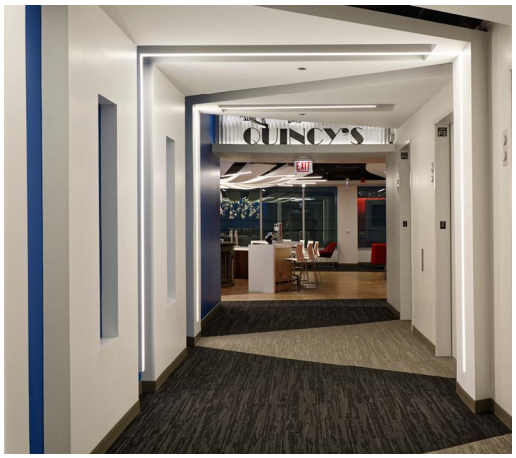

Via patterns recessed inner corner

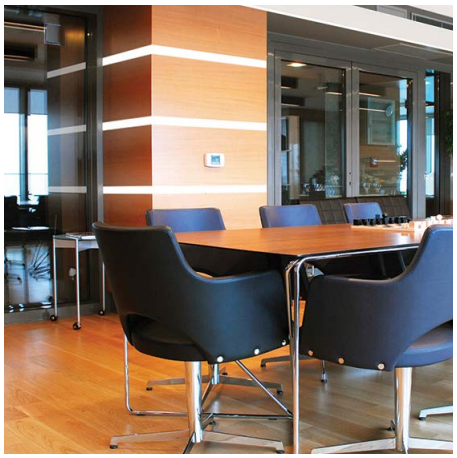
Via patterns recessed outside corner

Via patterns recessed leveled corner

LUMINAIRE ID	VIA1.5, VIA2, VIA3, VIA4 & VIA5


LEV - Leveled corner


INN - Inner corner


OUT - Outer corner

CORNER TYPE	Inner, outside & leveled corner
CORNER DEGREE	90 degree (max 4 corners)

We require a drawing illustrating the pattern being ordered - anything from a simple line drawing to elaborate architectural drawings will suffice.

Order Check list

1. Download spec sheet from www.lumenwerx.com.
2. Specify the product as per the information on this page.
3. PO must clearly indicate LumenXpress.
4. Send an email to lumenxpress@lumenwerx.com along with a PO and a formal quote # or price confirmation.

The following options may require additional lead time: 347V, Other Lutron Drivers, Group Controls, ChromaWerx.

VIA PATTERNS DIRECT

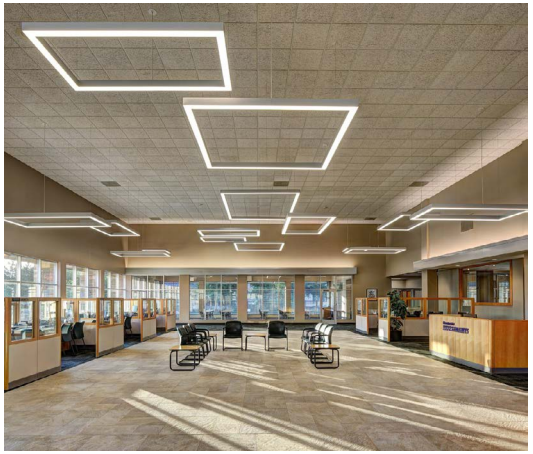

Via 4 pendant patterns direct

LUMINAIRE ID	VIA1.5, VIA2, VIA3, VIA4 & VIA5



LEV - Pendant leveled corner



LEV - Wall leveled corner



LEV - Wall leveled corner

VIA PATTERNS DIRECT/INDIRECT

LUMINAIRE ID	VIA1.5, VIA2 & VIA4



LEV - Pendant leveled corner



LEV - wall leveled corner

CORNER TYPE	Leveled corner
CORNER DEGREE	90 degree (max 4 corners)

We require a drawing illustrating the pattern you are trying to achieve - anything from a simple line drawing to elaborate architectural drawings will suffice.

Order Check list

1. Download spec sheet from www.lumenwerx.com.
2. Specify the product as per the information on this page.
3. PO must clearly indicate LumenXpress.
4. Send an email to lumenxpress@lumenwerx.com along with a PO and a formal quote # or price confirmation.

The following options may require additional lead time: 347V, Other Lutron Drivers, Group Controls, Custom Finish & ChromaWerx.

CAVA - RECESSED

LUMENXPRESS
lumenxpress@lumenwerx.com

Cava recessed

Order Check list

1. Download spec sheet from www.lumenwerx.com.
2. Specify the product as per the information on this page.
3. PO must clearly indicate LumenXpress.
4. Send an email to lumenxpress@lumenwerx.com along with a PO and a formal quote # or price confirmation.

LIGHT SOURCE	LED
CRI	80 CRI, 90CRI
COLOR TEMP.	30k, 35k & 40k
LUMINAIRE LENGTH	Individual Units & Continuous Runs
VOLTAGE	120V, 277V & UNV
DRIVER	Dimming 0-10V, Lutron LDE1 & LDE5
ELECTRICAL	1 circuit +EB/EM
MOUNTING	TG, TB, ST & Drywall
FINISH	White
CONTROLS	Individual Daylight
OPTIONS	Fuse, Flexible Whip Cable, Chicago Plenum

LUMINAIRE ID

CAVA GRID

CAVA DRYWALL

The following options may require additional lead time: 347V, Other Lutron Drivers, Group Controls & ChromaWerx.

QUAD

Quad pendant cable

LUMINAIRE ID	
	
QUAD NARROW	QUAD WIDE

Order Check list

1. Download spec sheet from www.lumenwerx.com.
2. Specify the product as per the information on this page.
3. PO must clearly indicate LumenXpress.
4. Send an email to lumenxpress@lumenwerx.com along with a PO and a formal quote # or price confirmation.

LIGHT SOURCE	LED
CRI	80 CRI, 90CRI
COLOR TEMP.	30k, 35k, 40k & 50k
VOLTAGE	120V, 277V & UNV
DRIVER	Dimming 0-10V, Lutron LDE1 & LDE5
ELECTRICAL	1 circuit +EB/EM
MOUNTING	Pendant, Surface Mount
FINISH	White
CONTROLS	Individual Daylight & Occupancy Sensors
OPTIONS	Fuse, Caddy Clip

The following options may require additional lead time: 347V, Other Lutron Drivers, Group Controls, Custom Finish & ChromaWerx.

DIRECT/INDIRECT

LUMENXPRESS
lumenxpress@lumenwerx.com

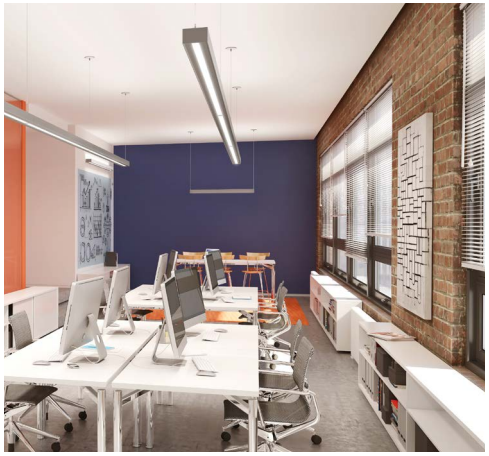

Canyon pendant cable

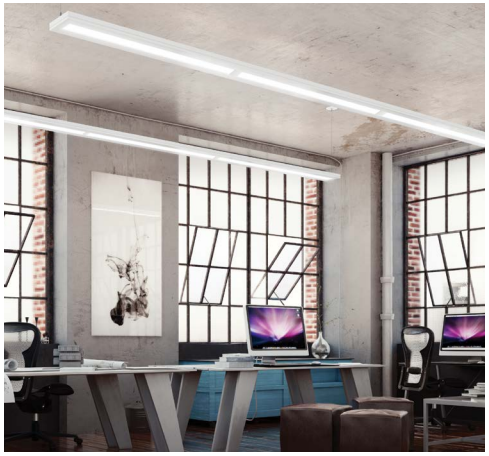

Reven pendant cable

Order Check list

1. Download spec sheet from www.lumenwerx.com.
2. Specify the product as per the information on this page.
3. PO must clearly indicate LumenXpress.
4. Send an email to lumenxpress@lumenwerx.com along with a PO and a formal quote # or price confirmation.

LIGHT SOURCE	LED
CRI	80 CRI, 90CRI
COLOR TEMP.	30k, 35k & 40k
VOLTAGE	120V, 277V & UNV
DRIVER	Dimming 0-10V, Lutron LDE1 & LDE5
ELECTRICAL	1 circuit/2 circuits +EB/EM
MOUNTING	Pendant
FINISH	White
CONTROLS	Individual Daylight & Occupancy Sensors
OPTIONS	Fuse, Caddy Clip

LUMINAIRE ID



REVEN SIB



REVEN ICL

CANYON

CAMBER SIB

CAMBER ICL

The following options may require additional lead time: 347V, Other Lutron Drivers, Group Controls, Wall Mounting, Aluminum, Custom finish & ChromaWerx.

NOVA & VEGA - RECESSED

Nova 2x2 recessed grid

Order Check list

1. Download spec sheet from www.lumenwerx.com.
2. Specify the product as per the information on this page.
3. PO must clearly indicate LumenXpress.
4. Send an email to lumenxpress@lumenwerx.com along with a PO and a formal quote # or price confirmation.

LIGHT SOURCE	LED
CRI	80 CRI, 90CRI
COLOR TEMP.	30k, 35k & 40k
VOLTAGE	120V, 277V & UNV
DRIVER	Dimming 0-10V, Lutron LDE1 & LDE5
ELECTRICAL	1 circuit +EB
MOUNTING	TG, TB, ST
FINISH	White
CONTROLS	Individual Daylight & Occupancy Sensors
OPTIONS	Fuse, Chicago Plenum, Flexible Whip Cable

LUMINAIRE ID

NOVA 1X4



NOVA 2X2

NOVA 2X4

VEGA 1X4

VEGA 2X2

VEGA 2X4

The following options may require additional lead time: 347V, Other Lutron Drivers, Drywall Mounting, Group Controls, Air Return (for grid only) & ChromaWerx.

PRIMO - RECESSED

LUMENXPRESS
lumenxpress@lumenwerx.com

Primo recessed 1X4 & 2X2

Order Check list

1. Download spec sheet from www.lumenwerx.com.
2. Specify the product as per the information on this page.
3. PO must clearly indicate LumenXpress.
4. Send an email to lumenxpress@lumenwerx.com along with a PO and a formal quote # or price confirmation.

LIGHT SOURCE	LED
CRI	80 CRI, 90CRI
COLOR TEMP.	30k, 35k & 40k
VOLTAGE	120V, 277V & UNV
DRIVER	Dimming 0-10V, Lutron LDE1 & LDE5
ELECTRICAL	1 circuit +EB
MOUNTING	TG, TB, ST
FINISH	White
OPTIONS	Fuse, Flexible Whip Cable, Chicago Plenum

LUMINAIRE ID

PRIMO 1X4 RECESSED

PRIMO 2X2 RECESSED

The following options may require additional lead time: 347V, Other Lutron Drivers, Drywall Mounting, Group Controls & ChromaWerx.

POP - RECESSED

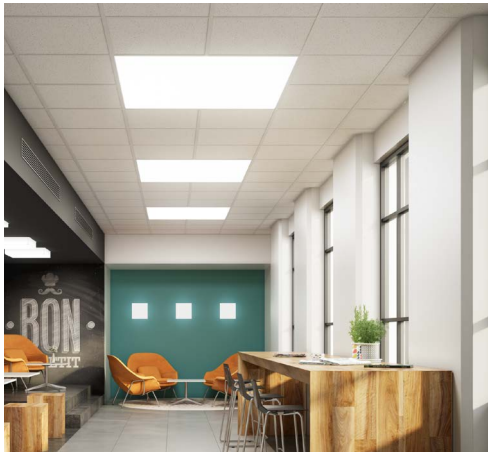

POP Recessed square 1X1

POP Recessed round 24

Order Check list

1. Download spec sheet from www.lumenwerx.com.
2. Specify the product as per the information on this page.
3. PO must clearly indicate LumenXpress.
4. Send an email to lumenxpress@lumenwerx.com along with a PO and a formal quote # or price confirmation.

LENS	Flush
LIGHT SOURCE	LED
CRI	80 CRI, 90CRI
COLOR TEMP.	30k, 35k, 40k & 50k
VOLTAGE	120V, 277V & UNV
DRIVER	Dimming 0-10V
ELECTRICAL	1 circuit +EB
MOUNTING	TG, TB, ST & Drywall Trim
FINISH	White
OPTIONS	Fuse

LUMINAIRE ID



SQUARE 1X1

SQUARE 2X2

ROUND 12

ROUND 24

ROUND 36

The following options may require additional lead time: Sizes 4'x4' & 48", Drop Lens, 347V, Other Lutron Drivers, Group Controls & ChromaWerx.

POP COLOR

LUMENXPRESS
lumenxpress@lumenwerx.com

POP Color pendant

LUMINAIRE ID		
 SQUARE 1X1	 SQUARE 2X2	
ROUND 12	ROUND 24	ROUND 36

Order Check list

1. Download spec sheet from www.lumenwerx.com.
2. Specify the product as per the information on this page.
3. PO must clearly indicate LumenXpress.
4. Send an email to lumenxpress@lumenwerx.com along with a PO and a formal quote # or price confirmation.

LIGHT SOURCE	LED
CRI	80 CRI, 90CRI
COLOR TEMP.	30k, 35k, 40k & 50k
VOLTAGE	120V, 277V & UNV
DRIVER	Dimming 0-10V, DALI
ELECTRICAL	1 circuit +EB
MOUNTING	Pendant, Surface Mount
FINISH	Standard Colours
OPTIONS	Fuse, Caddy Clip

The following options may require additional lead time: Sizes 4'x4' & 48", Drop Lens, Group Controls, Custom Finish & ChromaWerx.

POP CORE

POP Core wall

Order Check list

1. Download spec sheet from www.lumenwerx.com.
2. Specify the product as per the information on this page.
3. PO must clearly indicate LumenXpress.
4. Send an email to lumenxpress@lumenwerx.com along with a PO and a formal quote # or price confirmation.

LIGHT SOURCE	LED
CRI	80 CRI, 90CRI
COLOR TEMP.	30k, 35k, 40k & 50k
VOLTAGE	120V, 277V & UNV
DRIVER	Dimming 0-10V, DALI
ELECTRICAL	1 circuit +EB
MOUNTING	Pendant, Wall, Surface Mount
FINISH	White
OPTIONS	Fuse, Caddy Clip

LUMINAIRE ID



SQUARE 1X1



SQUARE 2X2

ROUND 12



ROUND 24

ROUND 36

The following options may require additional lead time: Sizes 4'x4' & 48", Drop Lens, Group Controls, Custom Finish & ChromaWerx.

INWALO - RECESSED WALL

LUMENXPRESS
lumenxpress@lumenwerx.com

InWalo recessed wall

Order Check list

1. Download spec sheet from www.lumenwerx.com.
2. Specify the product as per the information on this page.
3. PO must clearly indicate LumenXpress.
4. Send an email to lumenxpress@lumenwerx.com along with a PO and a formal quote # or price confirmation.

LIGHT SOURCE	LED
CRI	80 CRI, 90CRI
COLOR TEMP.	30k, 35k & 40k
LUMINAIRE LENGTH	Individual Units & Continuous Runs
VOLTAGE	120V, 277V & UNV
DRIVER	Dimming 0-10V, Lutron LDE1 & LDE5
ELECTRICAL	1 circuit +EM/NL
MOUNTING	Trim, Drywall Trim
FINISH	White
OPTIONS	Fuse

LUMINAIRE ID



INWALO DMF

INWALO DTR

The following options may require additional lead time: 27k, Other Lutron Drivers, Antibacterial Paint & Custom Finish.

CUBITO - RECESSED WALL

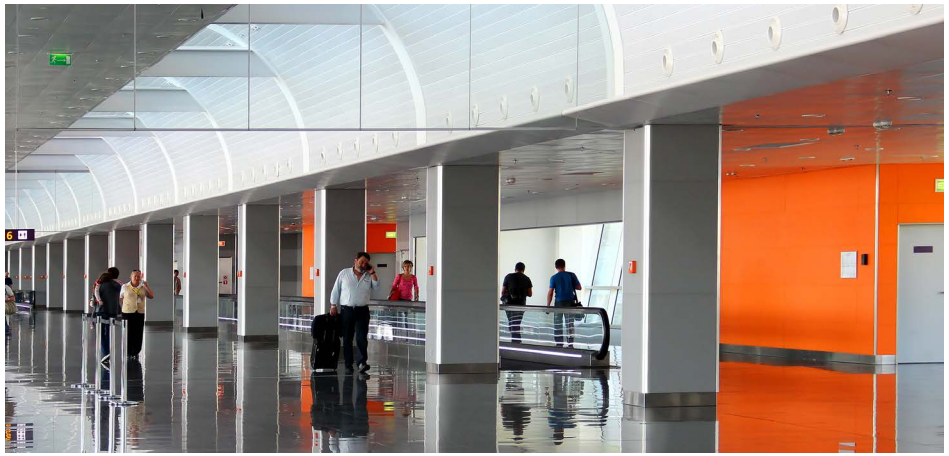

Cubito recessed wall

LUMINAIRE ID
 CUBITO

Order Check list

1. Download spec sheet from www.lumenwerx.com.
2. Specify the product as per the information on this page.
3. PO must clearly indicate LumenXpress.
4. Send an email to lumenxpress@lumenwerx.com along with a PO and a formal quote # or price confirmation.

LIGHT SOURCE	LED
CRI	80 CRI, 90CRI
COLOR TEMP.	30k, 35k & 40k
LUMINAIRE LENGTH	Individual Units & Continuous Runs
VOLTAGE	120V, 277V & UNV
DRIVER	Dimming 0-10V, DALI, Lutron LDE1 & LDE5
ELECTRICAL	1 circuit +EM/NL
MOUNTING	Drywall Mud Flange
FINISH	White

The following options may require additional lead time: Other Lutron Drivers.

CUBITO - SURFACE

LUMENXPRESS
lumenxpress@lumenwerx.com

Cubito surface-wall

LUMINAIRE ID

CUBITO

Order Check list

1. Download spec sheet from www.lumenwerx.com.
2. Specify the product as per the information on this page.
3. PO must clearly indicate LumenXpress.
4. Send an email to lumenxpress@lumenwerx.com along with a PO and a formal quote # or price confirmation.

LIGHT SOURCE	LED
CRI	80 CRI, 90CRI
COLOR TEMP.	30k, 35k & 40k
LUMINAIRE LENGTH	Individual Units & Continuous Runs
VOLTAGE	120V, 277V & UNV
DRIVER	0-10V Mikro Driver
ELECTRICAL	1 circuit +EM/NL
MOUNTING	Drywall Mounting
FINISH	White

For 2ft sections only.

VIA PERIMETER

Via Perimeter recessed

LUMINAIRE ID	
PERIMETER 3	PERIMETER 5

Order Check list

1. Download spec sheet from www.lumenwerx.com.
2. Specify the product as per the information on this page.
3. PO must clearly indicate LumenXpress.
4. Send an email to lumenxpress@lumenwerx.com along with a PO and a formal quote # or price confirmation.

FLANGE HEIGHT	Leveled, Shallow, Deep
LIGHT SOURCE	LED
CRI	80 CRI, 90CRI
COLOR TEMP.	30k, 35k & 40k
LUMINAIRE LENGTH	Individual Units & Continuous Runs
VOLTAGE	120V, 277V & UNV
DRIVER	Dimming 0-10V, Lutron LDE1 & LDE5
ELECTRICAL	1 circuit +EB/EM
MOUNTING	TG, TB, ST, Trim, Trimless & Mud flange
FINISH	White
OPTIONS	Fuse, Chicago Plenum, Flexible Whip Cable

ADJUSTABLE SLEEVES



TES - Optional adjustable end sleeve (for a minimum 5ft fixture length)



#TMS - Optional adjustable mid sleeve (for patterns only)

Adjustable sleeve is designed to provide on-site luminaire adjustability of +2.5" to -4.5". A sleeve accommodates an easy installation and maintenance. Available for fixtures over 5ft long.

The following options may require additional lead time: 347V, Other Lutron Drivers & ChromaWerx.

VIA PERIMETER PATTERNS

LUMENXPRESS
lumenxpress@lumenwerx.com

Via Perimeter patterns recessed

LUMINAIRE ID	
	
PERIMETER 3	PERIMETER 5

Order Check list

1. Download spec sheet from www.lumenwerx.com.
2. Specify the product as per the information on this page.
3. PO must clearly indicate LumenXpress.
4. Send an email to lumenxpress@lumenwerx.com along with a PO and a formal quote # or price confirmation.

FLANGE HEIGHT	Leveled, Shallow, Deep
LIGHT SOURCE	LED
CRI	80 CRI, 90CRI
COLOR TEMP.	30k, 35k & 40k
PATTERN LENGTH	Individual Units & Continuous Runs
CORNER TYPE	Leveled Outside and Inside
CORNER DEGREE	90 degrees
VOLTAGE	120V, 277V & UNV
DRIVER	Dimming 0-10V, Lutron LDE1 & LDE5
ELECTRICAL	1 circuit +EB/EM
MOUNTING	TG, TB, ST, Trim, Trimless & Mud flange
FINISH	White
OPTIONS	Fuse, Chicago Plenum, Flexible Whip Cable

The following options may require additional lead time: 347V & Other Lutron Drivers

VIA SKIM

Via skim recessed

LUMINAIRE ID
VIA SKIM

Order Check list

1. Download spec sheet from www.lumenwerx.com.
2. Specify the product as per the information on this page.
3. PO must clearly indicate LumenXpress.
4. Send an email to lumenxpress@lumenwerx.com along with a PO and a formal quote # or price confirmation.

FLANGE HEIGHT	Shallow, Deep
LIGHT SOURCE	LED
CRI	80 CRI, 90CRI
COLOR TEMP.	30k, 35k & 40k
LUMINAIRE LENGTH	Individual Units & Continuous Runs
VOLTAGE	120V, 277V & UNV
DRIVER	Dimming 0-10V, Lutron LDE1 & LDE5
ELECTRICAL	1 circuit +EB/EM
MOUNTING	TG, TB, ST, Trim, Trimless & Mud flange
FINISH	White
OPTIONS	Fuse, Chicago Plenum, Flexible Whip Cable

The following options may require additional lead time: 347V & Other Lutron Drivers.

VIA SKIM PATTERNS

LUMENXPRESS
lumenxpress@lumenwerx.com

Via Skim patterns recessed

Order Check list

1. Download spec sheet from www.lumenwerx.com.
2. Specify the product as per the information on this page.
3. PO must clearly indicate LumenXpress.
4. Send an email to lumenxpress@lumenwerx.com along with a PO and a formal quote # or price confirmation.

FLANGE HEIGHT	Shallow, Deep
LIGHT SOURCE	LED
CRI	80 CRI, 90CRI
COLOR TEMP.	30k, 35k & 40k
LUMINAIRE LENGTH	Individual Units & Continuous Runs
VOLTAGE	120V, 277V & UNV
DRIVER	Dimming 0-10V, Lutron LDE1 & LDE5
ELECTRICAL	1 circuit +EB/EM
MOUNTING	TG, TB, ST, Trim, Trimless & Mud flange
FINISH	White
OPTIONS	Fuse, Chicago Plenum, Flexible Whip Cable

LUMINAIRE ID
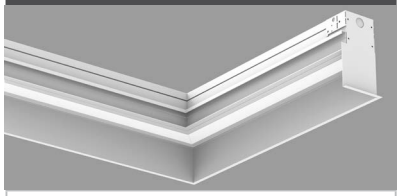
VIA3 SKIM

The following options may require additional lead time: 347V & Other Lutron Drivers.

ALCOVE

Alcove cove

LUMINAIRE ID
ALCOVE

Order Check list

1. Download spec sheet from www.lumenwerx.com.
2. Specify the product as per the information on this page.
3. PO must clearly indicate LumenXpress.
4. Send an email with a PO and a formal quote # or price confirmation to lumenxpress@lumenwerx.com

LIGHT SOURCE	LED
CRI	80 CRI, 90CRI
COLOR TEMP.	30k, 35k & 40k
LUMINAIRE LENGTH	Individual Units & Continuous Runs
VOLTAGE	120V, 277V & UNV
DRIVER	Dimming 0-10V, Lutron LDE1 & LDE5
ELECTRICAL	1 circuit +EB/EM
MOUNTING	Cove
FINISH	White
OPTIONS	Fuse

ALCOVE RAMP

Alcove ramp cove

LUMINAIRE ID	
	
RAMP 90	RAMP 35

RAMP LENGTH	Standard Sections & Continuous Run
CORNER TYPE	90 degrees
MOUNTING	Cove
FINISH	Unfinished

The following options may require additional lead time: 347V, Other Lutron Drivers & ChromaWerx.

WALO

LUMENXPRESS
lumenxpress@lumenwerx.com

Walo wall direct/indirect

Order Check list

1. Download spec sheet from www.lumenwerx.com.
2. Specify the product as per the information on this page.
3. PO must clearly indicate LumenXpress.
4. Send an email to lumenxpress@lumenwerx.com along with a PO and a formal quote # or price confirmation.

LIGHT SOURCE	LED
CRI	80 CRI, 90CRI
COLOR TEMP.	30k, 35k, 40k
VOLTAGE	120V, 277V & UNV
DRIVER	Dimming 0-10V, Lutron LDE1 & LDE5
ELECTRICAL	1 circuit +EB/EM
MOUNTING	Drywall Ceiling
FINISH	White
OPTIONS	Fuse

LUMINAIRE ID	
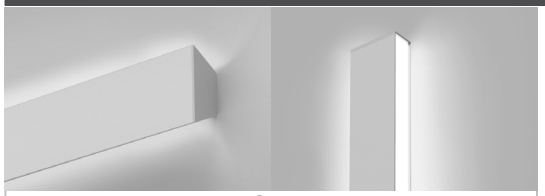	
WALO WALL	WALO SURFACE

The following options may require additional lead time: 347V, Other Lutron Drivers, Custom Finish & ChromaWerx.

VIA WET

Via Wet surface

Order Check list

1. Download spec sheet from www.lumenwerx.com.
2. Specify the product as per the information on this page.
3. PO must clearly indicate LumenXpress.
4. Send an email to lumenxpress@lumenwerx.com along with a PO and a formal quote # or price confirmation.

LIGHT SOURCE	LED
CRI	80 CRI, 90CRI
COLOR TEMP.	30k, 35k, 40k
VOLTAGE	120V, 277V & UNV
DRIVER	Dimming 0-10V, DALI
ELECTRICAL	1 circuit +EB/EM
MOUNTING	Stem, trim, trimless
FINISH	White

LUMINAIRE ID

VIA WET PENDANT

VIA WET WALL

VIA WET SURFACE

The following options may require additional lead time: Asymmetric, 347V & Other Lutron Drivers.

AXLE

LUMENXPRESS
lumenxpress@lumenwerx.com

Axle pendant and wall

Order Check list

1. Download spec sheet from www.lumenwerx.com.
2. Specify the product as per the information on this page.
3. PO must clearly indicate LumenXpress.
4. Send an email to lumenxpress@lumenwerx.com along with a PO and a formal quote # or price confirmation.

LIGHT SOURCE	LED
CRI	80 CRI, 90CRI
COLOR TEMP.	30k, 35k, 40k
VOLTAGE	120V, 277V & UNV
DRIVER	Dimming 0-10V, Lutron LDE1 & LDE5
ELECTRICAL	1 circuit +EB/EM
MOUNTING	Cable, CantileverArm
FINISH	White

LUMINAIRE ID



AXLE PENDANT

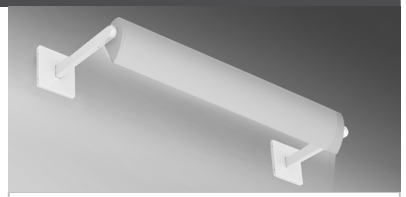

AXLE WALL

The following options may require additional lead time: Asymmetric, 347V, Other Lutron Drivers. & Custom Finish.

TOGO

Togo 24" wall RGB

Order Check list

1. Download spec sheet from www.lumenwerx.com.
2. Specify the product as per the information on this page.
3. PO must clearly indicate LumenXpress.
4. Send an email to lumenxpress@lumenwerx.com along with a PO and a formal quote # or price confirmation.

LIGHT SOURCE	Static White
CRI	90CRI
COLOR TEMP.	30k, 35k & 40k
VOLTAGE	120V, 277V & UNV
DRIVER	Dimming 0-10V, Lutron LDE1 & LDE5
ELECTRICAL	1 circuit +EB
MOUNTING	Pendant, Wall
FINISH	Standard Colours

LUMINAIRE ID



TOGO 18



TOGO 24

TOGO 36

TOGO 48



TOGO 18



TOGO 24

The following options may require additional lead time: Other Lutron Drivers, Custom Finish & ChromaWerx.

LUMENWERX

www.lumenwerx.com
(T) 514-225-4304 • (F) 514-931-4862