

QUICK SHIP

SHIPS
WITHIN
2
WEEKS

 hameleon

THE ART OF ADAPTATION



bold



Shipping **within 2 weeks.**

Up to **200 downlights** per order.

Our Quick ship program offers a reliable on-time delivery to align with the most demanding of project schedules. Every order is produced in accordance with your requirements from our expansive offering of options and **ships within 2 weeks.**

INSTRUCTIONS

Use provided Excel file to configure exact specification and price.

Place orders through orders@boldlighting.com.

Include "Quick Ship" in the subject line.

Reach out to your Bold Sales Representative with any questions.

TERMS & CONDITIONS

- Delivery within 10 business days from sales order confirmation.
- Shipping dates are estimated and do not include weekends or holidays.
- 10 day delivery applies to products from the quick ship program only.
- 10 day delivery applies to orders up to 200 units or less.
- A small order fee of \$200 will apply to orders of less than 25 units.
- Order must be paid in full prior to shipment. Delay in payment will result in longer delivery times.
- Returns and exchanges not accepted for quick ship program.
- All quick ship orders subject to availability.

SIZE MATTERS

CHAMELEON 3"
9-13W / 1016-1422lm





CHAMELEON 4"
10-18W / 1108-1681lm

3" SQUARE
(2x)3-7/16"

3" ROUND
Ø3-7/16"

4" SQUARE
(2x)4-3/16"

4" ROUND
Ø4-3/16"



**FIXED
& WALWASHER**


DOWNLIGHT HEIGHT
R3: 3-3/4"
R4: 4"

**ADJUSTABLE
& ZOOMABLE**

DOWNLIGHT HEIGHT
R3: 4-1/8"
R4: 5"

SHALLOW

DOWNLIGHT HEIGHT
S3: 2-3/4"



↑ ↓ **CEILING THICKNESS**
MIN: 1/8" - MAX: 4"


OPTICAL PRECISION

ENDLESS POSSIBILITIES


FIXED DOWNLIGHT




WALLWASHERS

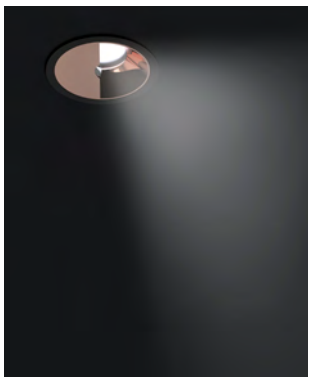

ADJUSTABLE ACCENT

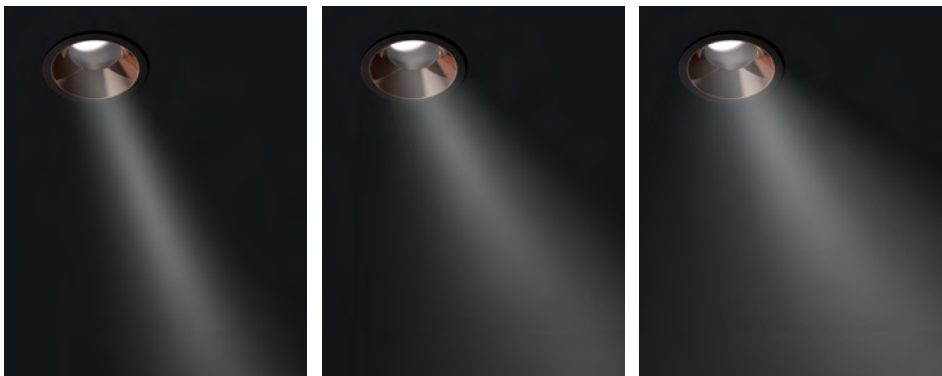

ZOOMABLE 15°-50°

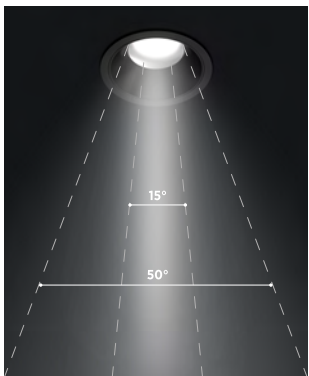



OPTICAL ACCESSORIES




ELLIPTICAL LENS | SOLITE LENS | DIFFUSE LENS | BEAM SHAPING LENS | HONEYCOMB

REFLECTOR FINISHES

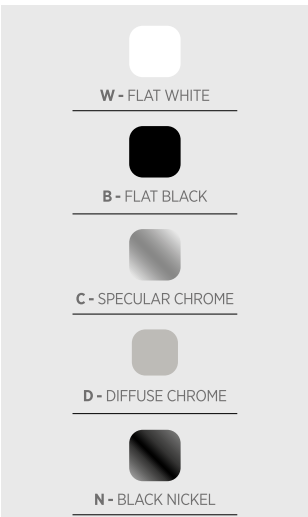

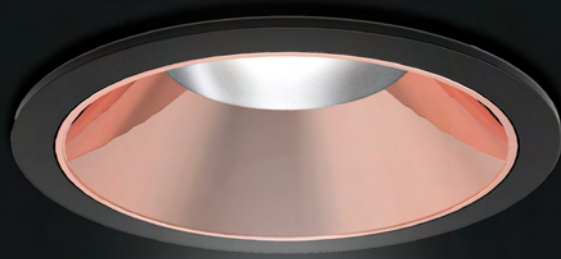

3" (75mm)



 **hameleon 3"**

Specsheets

QUICK SHIP

SHIPS
WITHIN
2
WEEKS

Chameleon

R3" QUIETLY ADJUSTABLE




Spec-grade performance LED downlights. Optimal for hospitality, commercial, high-end residential and corporate projects.

The Chameleon R3 downlights offer a high output, precise optics, a wide range of mounting options, reflector finishes, and optical accessories.

- Up to 1,422lm delivered output
- Trim and trimless mounting options
- Dim-to-Warm capability 3000K to 1800K
- Gear driven tilt 0° to 30° and 360° lockable rotation
- Zoomable Lens from 15° to 50°
- 5 years limited warranty
- Wide range of trims and reflectors finishes

Code example: **C3-A**R1W-LU2-RWD-S927-E

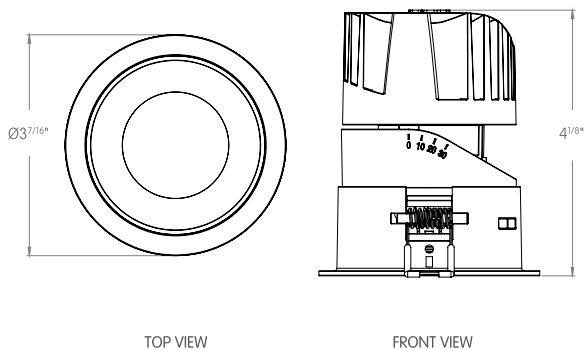

Series	Mounting	Trim Color	Output	Voltage	Control
C3-A	R1 Round Trim	W White	L 9W (1016lm)	U Universal 120V to 277V	0 Non-Dim
	R0 Round Trimless		M 11W (1219lm)		1 0-10 to 1%
			H 13W (1422lm)		2 0-10 fade-off
					P Phase ELV & Triac

Housing	Ref. Color	IP Rating	Optics Type	LED CRI	LED CCT	Accessories
R Remodel	W Flat White	D Dry	S 12°	9 90	27 2700K	C Clear Lens
N Non-IC	B Flat Black	W Wet	F 36°		30 3000K	D ⁴ Diffuse lens
P IC	C Specular Chrome				WD ⁵ 3000K - 1800K	E ⁵ Elliptical Lens
A ² Airtight						S Solite Lens

Notes:

¹ Not applicable for ELV dimming.

² Chicago Plenum rated.

³ Dim-to-Warm only available in CRI +90.

⁴ Diffuse lenses available in different angles.

⁵ Elliptical lenses available in different angles.

Consult factory for lead-times.

Bold Lighting reserves the right to make technical changes without notice.



QUICK SHIP

SHIPS
WITHIN
2
WEEKS

Chameleon

R3" QUIETLY FIXED




Spec-grade performance LED downlights. Optimal for hospitality, commercial, high-end residential and corporate projects.

The Chameleon R3 downlights offer a high output, precise optics, a wide range of mounting options, reflector finishes, and optical accessories.

- Up to 1,422lm delivered output
- Trim and trimless mounting options
- Dim-to-Warm capability 3000K to 1800K
- Wide Range of optical options
- 5 years limited warranty
- Wide range of trims and reflectors finishes

* Downlight is inherently IC rated per ETL testing to UL1598 standard and can be installed without a housing when specified with Standard Output (11 Watts). LED driver current is factory set at 260mA.

Code example: **C3-F**R1W-LU2-RWD-S927-E

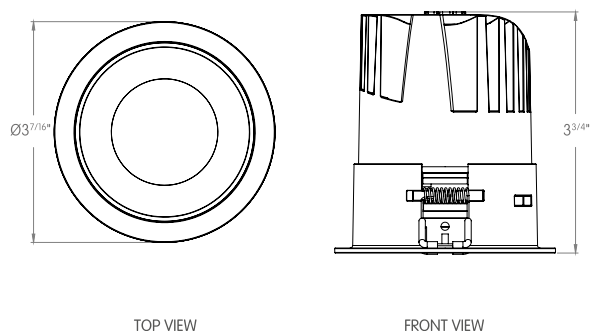

Series	Mounting	Trim Color	Output	Voltage	Control
C3-F	R1 Round Trim	W White	L 9W (993lm)	U Universal 120V to 277V	0 Non-Dim
	R0 Round Trimless	B Black	M 11W (1191lm)		1 0-10 to 1%
		S Grey	H 13W (1390lm)		2 0-10 fade-off
					P Phase ELV & Triac

Housing	Ref. Color	IP Rating	Optics Type	LED CRI	LED CCT	Accessories
R Remodel	W Flat White	D Dry	S 12°	9 90	27 2700K	C Clear Lens
N Non-IC	B Flat Black	W Wet	M 24°		30 3000K	D ⁴ Diffuse lens
P IC	C Specular Chrome		F 36°		WD ⁵ 3000K - 1800K	E ⁵ Elliptical Lens
A ² Airtight	D Diffuse Chrome					S Solite Lens

Notes:

¹ Not applicable for ELV dimming.

² Chicago Plenum rated.

³ Dim-to-Warm only available in CRI +90.

⁴ Diffuse lenses available in different angles.

⁵ Elliptical lenses available in different angles.

Consult factory for lead-times.

Bold Lighting reserves the right to make technical changes without notice.



QUICK SHIP

SHIPS
WITHIN
2
WEEKS


Chameleon

R3" QUIETLY WASHED



Spec-grade performance LED downlights. Optimal for hospitality, commercial, high-end residential and corporate projects. The Chameleon R3 downlights offer a high output, precise optics, a wide range of mounting options, reflector finishes, and optical accessories.

- Up to 1,422lm delivered output
- Trim and trimless mounting options
- Dim-to-Warm capability 3000K to 1800K
- High uniformity light distribution Emin./ Emax.= 1/3
- 5 years limited warranty
- Wide range of trims and reflectors finishes

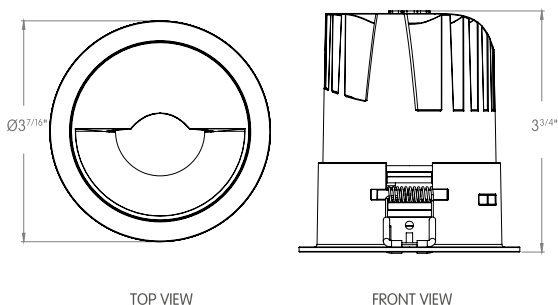

Code example: **C3-W** R1W - LU2 - RWD - M927

Series	Mounting	Trim Color	Output	Voltage
C3-W	R1 Round Trim	W White	L 9W (635lm)	U Universal 120V to 277V
	R0 Round Trimless	B Black	M 11W (762lm)	
		S Grey	H 13W (889lm)	

Control	Housing	Ref. Color	IP Rating	Optics Type	LED CRI	LED CCT
0 Non-Dim	R Remodel	W Flat White	D Dry	M 24°	9 90	27 2700K
1 0-10 to 1%	N Non-IC		W Wet			30 3000K
2 0-10 fade-off	P IC					WD³ 3000K - 1800K
P Phase ELV & Triac	A² Airtight					

Notes:

¹ Not applicable for ELV dimming.

² Chicago Plenum rated.

³ Dim-to-Warm only available in CRI +90.

Consult factory for lead-times.

Bold Lighting reserves the right to make technical changes without notice.



QUICK SHIP

SHIPS
WITHIN
2
WEEKS

Chameleon

R3" QUIETLY ZOOMABLE




Spec-grade performance LED downlights. Optimal for hospitality, commercial, high-end residential and corporate projects.

The Chameleon R3 downlights offer a high output, precise optics, a wide range of mounting options, reflector finishes, and optical accessories.

- Up to 1,422lm delivered output
- Trim and trimless mounting options
- Dim-to-Warm capability 3000K to 1800K
- Gear driven tilt 0° to 30° and 360° lockable rotation
- Zoomable Lens from 15° to 50°
- 5 years limited warranty
- Wide range of trims and reflectors finishes

Code example: **C3-Z**R1W-LU2-RWD-Z927-H

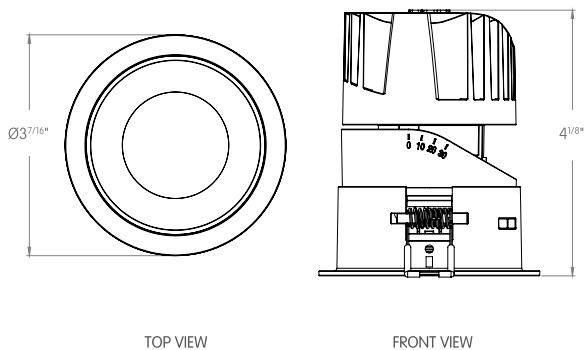

Series	Mounting	Trim Color	Output	Voltage	Control
C3-Z	R1 Round Trim	W White	L 9W (901lm)	U Universal 120V to 277V	0 Non-Dim
	R0 Round Trimless		M 11W (1030lm)		1 0-10 to 1%
			H 13W (1212lm)		2 0-10 fade-off
					P Phase ELV & Triac

Housing	Ref. Color	IP Rating	Optics Type	LED CRI	LED CCT	Accessories
R Remodel	W Flat White	D Dry	Z 15°-50°	9 90	27 2700K	C Clear Lens
N Non-IC	B Flat Black	W Wet			30 3000K	D ⁴ Diffuse lens
P ² IC	C Specular Chrome				WD ³ 3000K - 1800K	E ⁵ Elliptical Lens
A ² Airtight						S Solite Lens
						H Honeycomb

Notes:

¹ Not applicable for ELV dimming.

² Chicago Plenum rated.

³ Dim-to-Warm only available in CRI +90.

⁴ Diffuse lenses available in different angles.

⁵ Elliptical lenses available in different angles.

Consult factory for lead-times.

Bold Lighting reserves the right to make technical changes without notice.



QUICK SHIP

SHIPS
WITHIN
2
WEEKS

Chameleon

S3" QUIETLY ADJUSTABLE




Spec-grade performance LED downlights. Optimal for hospitality, commercial, high-end residential and corporate projects.

The Chameleon S3 downlights offer a high output, precise optics, a wide range of mounting options, reflector finishes, and optical accessories.

- Up to 1,422lm delivered output
- Trim and trimless mounting options
- Dim-to-Warm capability 3000K to 1800K
- Gear driven tilt 0° to 30° and 360° lockable rotation
- Zoomable Lens from 15° to 50°
- 5 years limited warranty
- Wide range of trims and reflectors finishes

Code example: **C3-A** S1W-LU2-RWD-S927-H

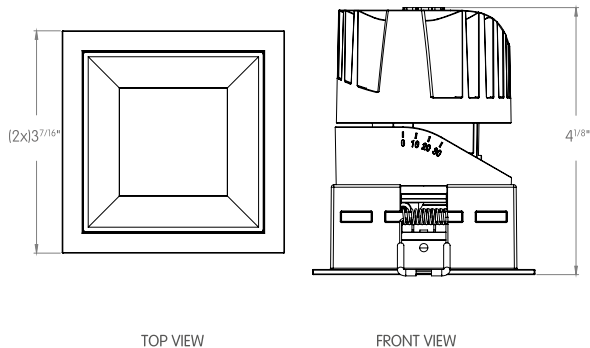

Series	Mounting	Trim Color	Output	Voltage	Control
C3-A	S1 Square Trim	W White	L 9W (1016lm)	U Universal 120V to 277V	0 Non-Dim
	S0 Square Trimless	B Black	M 11W (1219lm)		1 0-10 to 1%
		S Grey	H 13W (1422lm)		2 0-10 fade-off
					P Phase ELV & Triac

Housing		Ref. Color		IP Rating		Optics Type		LED CRI		LED CCT		Accessories	
R	Remodel	W	Flat White	D	Dry	S	12°	9	90	27	2700K	C	Clear Lens
N	Non-IC	B	Flat Black	W	Wet	M	24°			30	3000K	D ⁴	Diffuse lens
P ²	IC	C	Specular Chrome			F	36°			WD ³	3000K - 1800K	E ⁵	Elliptical Lens
A ²	Airtight											S	Solite Lens
												H	Honeycomb

Notes:

¹ Not applicable for ELV dimming.

² Chicago Plenum rated.

³ Dim-to-Warm only available in CRI +90.

⁴ Diffuse lenses available in different angles.

⁵ Elliptical lenses available in different angles.

Consult factory for lead-times.

Bold Lighting reserves the right to make technical changes without notice.



QUICK SHIP

SHIPS
WITHIN
2
WEEKS

Chameleon


S3" QUIETLY FIXED



Spec-grade performance LED downlights. Optimal for hospitality, commercial, high-end residential and corporate projects.

The Chameleon R3 downlights offer a high output, precise optics, a wide range of mounting options, reflector finishes, and optical accessories.

- Up to 1,422lm delivered output
- Trim and trimless mounting options
- Dim-to-Warm capability 3000K to 1800K
- Wide Range of optical options
- 5 years limited warranty
- Wide range of trims and reflectors finishes

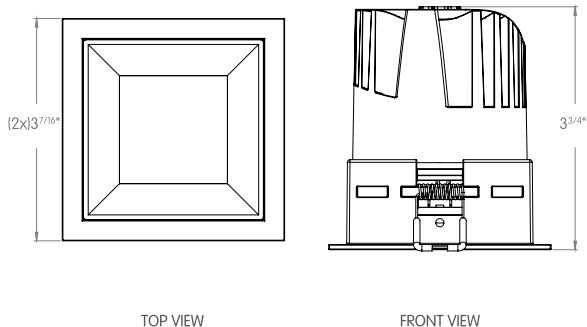

Code example: **C3-F**S1W-LU2-RWD-S927-E

Series	Mounting	Trim Color	Output	Voltage	Control
C3-F	S1 Square Trim	W White	L 9W (993lm)	U Universal 120V to 277V	0 Non-Dim
	S0 Square Trimless	B Black	M 11W (1191lm)		1 0-10 to 1%
		S Grey	H 13W (1390lm)		2 0-10 fade-off
					P Phase ELV & Triac

Housing	Ref. Color	IP Rating	Optics Type	LED CRI	LED CCT	Accessories
R Remodel	W Flat White	D Dry	S 12°	9 90	27 2700K	C Clear Lens
N Non-IC	B Flat Black	W Wet	M 24°		30 3000K	D Diffuse lens
P IC	C Specular Chrome		F 36°		WD ³ 3000K - 1800K	E Elliptical Lens
A ² Airtight	D Diffuse Chrome					S Solite Lens

Notes:

¹ Not applicable for ELV dimming.

² Chicago Plenum rated.

³ Dim-to-Warm only available in CRI +90.

⁴ Diffuse lenses available in different angles.

⁵ Elliptical lenses available in different angles.

Consult factory for lead-times.

Bold Lighting reserves the right to make technical changes without notice.



QUICK SHIP

SHIPS
WITHIN
2
WEEKS

Chameleon


S3" QUIETLY WASHED



Spec-grade performance LED downlights. Optimal for hospitality, commercial, high-end residential and corporate projects. The Chameleon R3 downlights offer a high output, precise optics, a wide range of mounting options, reflector finishes, and optical accessories.

- Up to 1,422lm delivered output
- Trim and trimless mounting options
- Dim-to-Warm capability 3000K to 1800K
- High uniformity light distribution Emin./ Emax.= 1/3
- 5 years limited warranty
- Wide range of trims and reflectors finishes

Code example: **C3-W** S1W-LU2-RWD-M927

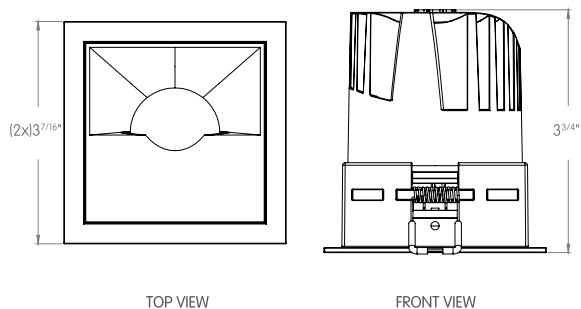

Series	Mounting	Trim Color	Output	Voltage
C3-W	S1 Square Trim	W White	L 9W (635lm)	U ¹ Universal 120V to 277V
	S0 Square Trimless	B Black	M 11W (762lm)	
		S Grey	H 13W (889lm)	

Control	Housing	Ref. Color	IP Rating	Optics Type	LED CRI	LED CCT
0 Non-Dim	R Remodel	W Flat White	D Dry	M 24°	9 90	27 2700K
1 0-10 to 1%	N Non-IC		W Wet			30 3000K
2 0-10 fade-off	I ² IC					WD ³ 3000K - 1800K
P Phase ELV & Triac	A ² Airtight					

Notes:

¹ Not applicable for ELV dimming.

² Chicago Plenum rated.

³ Dim-to-Warm only available in CRI +90.

Consult factory for lead-times.

Bold Lighting reserves the right to make technical changes without notice.



QUICK SHIP

SHIPS
WITHIN
2
WEEKS

Chameleon

S3" QUIETLY ZOOMABLE




Spec-grade performance LED downlights. Optimal for hospitality, commercial, high-end residential and corporate projects.

The Chameleon S3 downlights offer a high output, precise optics, a wide range of mounting options, reflector finishes, and optical accessories.

- Up to 1,422lm delivered output
- Trim and trimless mounting options
- Dim-to-Warm capability 3000K to 1800K
- Gear driven tilt 0° to 30° and 360° lockable rotation
- Zoomable Lens from 15° to 50°
- 5 years limited warranty
- Wide range of trims and reflectors finishes

Code example: **C3-Z** S1W-LU2-RWD-Z927-H

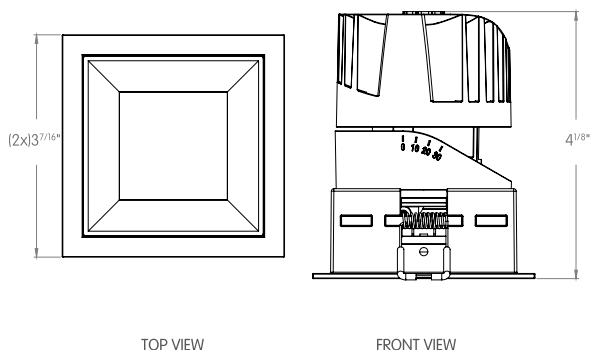

Series	Mounting	Trim Color	Output	Voltage	Control
C3-Z	S1 Square Trim	W White	L 9W (901lm)	U Universal 120V to 277V	0 Non-Dim
	S0 Square Trimless	B Black	M 11W (1030lm)		1 0-10 to 1%
		S Grey	H 13W (1212lm)		2 0-10 fade-off
					P Phase ELV & Triac

Housing	Ref. Color	IP Rating	Optics Type	LED CRI	LED CCT	Accessories
R Remodel	W Flat White	D Dry	Z 15° - 50°	9 90	27 2700K	C Clear Lens
N Non-IC	B Flat Black	W Wet			30 3000K	D ⁴ Diffuse lens
P IC	C Specular Chrome				WD ⁵ 3000K - 1800K	E ⁵ Elliptical Lens
A ² Airtight						S Solite Lens
						H Honeycomb

Notes:

¹ Not applicable for ELV dimming.

² Chicago Plenum rated.

³ Dim-to-Warm only available in CRI +90.

⁴ Diffuse lenses available in different angles.

⁵ Elliptical lenses available in different angles.



Consult factory for lead-times.

Bold Lighting reserves the right to make technical changes without notice.





4" (100mm)



 **hameleon 4"**

Specsheets

QUICK SHIP

SHIPS
WITHIN
2
WEEKS

Chameleon


R4" QUIETLY ADJUSTABLE



Spec-grade performance LED downlights. Optimal for hospitality, commercial, high-end residential and corporate projects.

The Chameleon R4 downlights offer a high output, precise optics, a wide range of mounting options, reflector finishes, and optical accessories.

- Up to 1,422lm delivered output
- Trim and trimless mounting options
- Gear driven tilt 0° to 35° and 360° lockable rotation
- Zoomable Lens from 10° to 50°
- 5 years limited warranty
- Wide range of trims and reflectors finishes

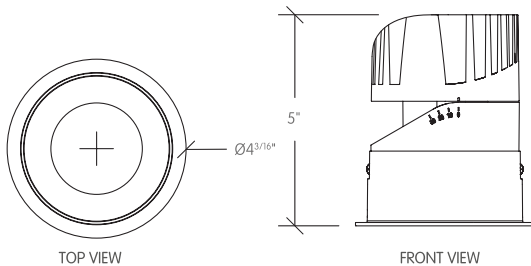

Code example: **C4-A**R1W-LU2-RWD-S927-H

Series	Mounting	Trim Color	Output	Voltage	Control
C4-A	R1 Round Trim	W White	L 10W (1108lm)	U Universal 120V to 277V	0 Non-Dim
	RO Round Trimless	S Grey	M 12W (1345lm)		1 0-10 to 1%
			H 18W (1681lm)		2 0-10 fade-off
					P Phase ELV & Triac

Housing	Ref. Color	IP Rating	Optics Type	LED CRI	LED CCT	Accessories
R Remodel	W Flat White	D Dry	S 12°	9 90	27 2700K	C Clear Lens
N Non-IC	B Flat Black	W Wet	M 24°		30 3000K	D ³ Diffuse lens
P IC	D Diffuse Chrome		F 36°			E ⁴ Elliptical Lens
A ² Airtight	N Black Nickel					S Solite Lens
						H Honeycomb

Notes:

¹ Not applicable for ELV dimming.

² Chicago Plenum rated.

³ Diffuse lenses available in different angles.

⁴ Elliptical lenses available in different angles.

Consult factory for lead-times.

Bold Lighting reserves the right to make technical changes without notice.



QUICK SHIP

SHIPS
WITHIN
2
WEEKS

Chameleon


R4" QUIETLY FIXED



Spec-grade performance LED downlights. Optimal for hospitality, commercial, high-end residential and corporate projects.

The Chameleon R4 downlights offer a high output, precise optics, a wide range of mounting options, reflector finishes, and optical accessories.

- Up to 1,422lm delivered output
- Trim and trimless mounting options
- Wide Range of optical options
- 5 years limited warranty
- Wide range of trims and reflectors finishes

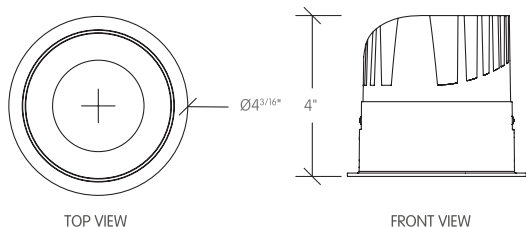

Code example: **C4-F**R1W-LU2-RWD-S927-H

Series	Mounting	Trim Color	Output	Voltage	Control
C4-F	R1 Round Trim	W White	L 10W (1108lm)	U Universal 120V to 277V	0 Non-Dim
	RO Round Trimless	S Grey	M 12W (1345lm)		1 0-10 to 1%
			H 18W (1681lm)		2 0-10 fade-off
					P Phase ELV & Triac

Housing	Ref. Color	IP Rating	Optics Type	LED CRI	LED CCT	Accessories
R Remodel	W Flat White	D Dry	S 12°	9 90	27 2700K	C Clear Lens
N Non-IC	B Flat Black	W Wet	M 24°		30 3000K	D ³ Diffuse lens
P IC	D Diffuse Chrome		F 36°			E ⁴ Elliptical Lens
A ² Airtight	N Black Nickel					S Solite Lens
						H Honeycomb

Notes:

¹ Not applicable for ELV dimming.

² Chicago Plenum rated.

³ Diffuse lenses available in different angles.

⁴ Elliptical lenses available in different angles.

Consult factory for lead-times.

Bold Lighting reserves the right to make technical changes without notice.



QUICK SHIP

SHIPS
WITHIN
2
WEEKS

Chameleon


R4" QUIETLY WASHED



Spec-grade performance LED downlights. Optimal for hospitality, commercial, high-end residential and corporate projects.

The Chameleon R4 downlights offer a high output, precise optics, a wide range of mounting options, reflector finishes, and optical accessories.

- Up to 1,422lm delivered output
- Trim and trimless mounting options
- High uniformity light distribution $E_{min.}/E_{max.} = 1/3$
- 5 years limited warranty
- Wide range of trims and reflectors finishes

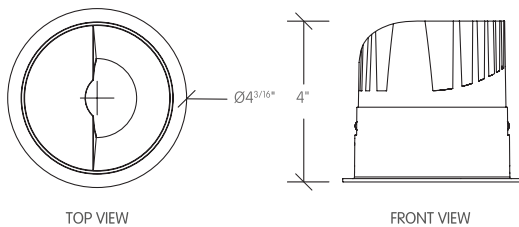

Code example: **C4-W**R1W-LU2-RWD-M927

Series	Mounting	Trim Color	Output	Voltage
C4-W	R1 Round Trim	W White	L 10W (1108lm)	U Universal 120V to 277V
	R0 Round Trimless	B Black	M 12W (1345lm)	
		S Grey	H 18W (1681lm)	

Control	Housing	Ref. Color	IP Rating	Optics Type	LED CRI	LED CCT
0 Non-Dim	R Remodel	W Flat White	D Dry	M 24°	9 90	27 2700K
1 0-10 to 1%	N Non-IC	D Diffuse Chrome	W Wet			30 3000K
2 0-10 fade-off	I ² IC					
P Phase ELV & Triac	A ² Airtight					

Notes:

¹ Not applicable for ELV dimming.

² Chicago Plenum rated.

Consult factory for lead-times.

Bold Lighting reserves the right to make technical changes without notice.



QUICK SHIP

SHIPS
WITHIN
2
WEEKS

Chameleon


S4" QUIETLY ADJUSTABLE



Spec-grade performance LED downlights. Optimal for hospitality, commercial, high-end residential and corporate projects.

The Chameleon S4 downlights offer a high output, precise optics, a wide range of mounting options, reflector finishes, and optical accessories.

- Up to 1,422lm delivered output
- Trim and trimless mounting options
- Gear driven tilt 0° to 35° and 360° lockable rotation
- Zoomable Lens from 10° to 50°
- 5 years limited warranty
- Wide range of trims and reflectors finishes

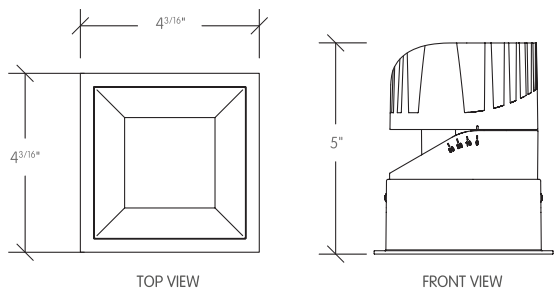

Code example: **C4-A**S1W-LU2-RWD-S927-E

Series	Mounting	Trim Color	Output	Voltage	Control
C4-A	S1 Square Trim	W White	L 10W (1108lm)	U Universal 120V to 277V	0 Non-Dim
	S0 Square Trimless	S Grey	M 12W (1345lm)		1 0-10 to 1%
			H 18W (1681lm)		2 0-10 fade-off
					P Phase ELV & Triac

Housing	Ref. Color	IP Rating	Optics Type	LED CRI	LED CCT	Accessories
R Remodel	W Flat White	D Dry	S 12°	9 90	27 2700K	C Clear Lens
N Non-IC	D Diffuse Chrome	W Wet	M 24°		30 3000K	D ³ Diffuse lens
P IC			F 36°			E ⁴ Elliptical Lens
A ² Airtight						S Solite Lens

Notes:

¹ Not applicable for ELV dimming.

² Chicago Plenum rated.

³ Diffuse lenses available in different angles.

⁴ Elliptical lenses available in different angles.

Consult factory for lead-times.

Bold Lighting reserves the right to make technical changes without notice.



QUICK SHIP

SHIPS
WITHIN
2
WEEKS

Chameleon


S4" QUIETLY FIXED



Spec-grade performance LED downlights. Optimal for hospitality, commercial, high-end residential and corporate projects.

The Chameleon S4 downlights offer a high output, precise optics, a wide range of mounting options, reflector finishes, and optical accessories.

- Up to 1,422lm delivered output
- Trim and trimless mounting options
- Wide Range of optical options
- 5 years limited warranty
- Wide range of trims and reflectors finishes

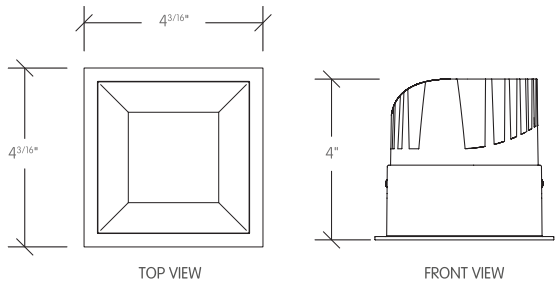

Code example: **C4-F**S1W-LU2-RWD-S927-E

Series	Mounting	Trim Color	Output	Voltage	Control
C4-F	S1 Square Trim	W White	L 10W (1108lm)	U Universal 120V to 277V	0 Non-Dim
	S0 Square Trimless	S Grey	M 12W (1345lm)		1 0-10 to 1%
			H 18W (1681lm)		2 0-10 fade-off
					P Phase ELV & Triac

Housing		Ref. Color		IP Rating		Optics Type		LED CRI		LED CCT		Accessories	
R	Remodel	W	Flat White	D	Dry	S	12°	9	90	27	2700K	C	Clear Lens
N	Non-IC	D	Diffuse Chrome		M	24°	30		3000K	D ³	Diffuse lens		
I ²	IC				F	36°				E ⁴	Elliptical Lens		
A ²	Airtight									S	Solite Lens		

Notes:

¹ Not applicable for ELV dimming.

² Chicago Plenum rated.

³ Diffuse lenses available in different angles.

⁴ Elliptical lenses available in different angles.

Consult factory for lead-times.

Bold Lighting reserves the right to make technical changes without notice.



QUICK SHIP

SHIPS
WITHIN
2
WEEKS

Chameleon


S4" QUIETLY WASHED



Spec-grade performance LED downlights. Optimal for hospitality, commercial, high-end residential and corporate projects.

The Chameleon S4 downlights offer a high output, precise optics, a wide range of mounting options, reflector finishes, and optical accessories.

- Up to 1,422lm delivered output
- Trim and trimless mounting options
- High uniformity light distribution $E_{min.}/E_{max.} = 1/3$
- 5 years limited warranty
- Wide range of trims and reflectors finishes

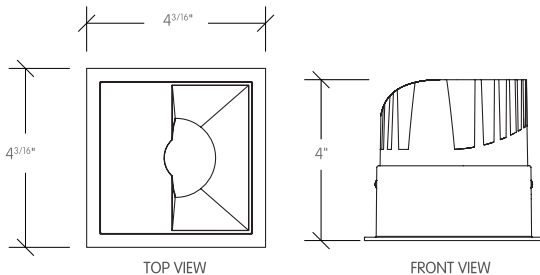

Code example: **C4-W** S1W-L10R-WW-M827-9-0

Series	Mounting	Trim Color	Output	Voltage
C4-W	S1 Square Trim	W White	L 10W (1108lm)	U Universal 120V to 277V
	S0 Square Trimless	S Grey	M 12W (1345lm)	
			H 18W (1681lm)	

Control	Housing	Ref. Color	IP Rating	Optics Type	LED CRI	LED CCT
0 Non-Dim	R Remodel	W Flat White	D Dry	M 24°	9 90	27 2700K
1 0-10 to 1%	N Non-IC		W Wet			30 3000K
2 0-10 fade-off	I IC					
P Phase ELV & Triac	A Airtight					

Notes:

- ¹ Not applicable for ELV dimming.
² Chicago Plenum rated.

Consult factory for lead-times.
 Bold Lighting reserves the right to make technical changes without notice.



ORDER NOW THROUGH
orders@boldlighting.com

bold

4710 Ecton Dr., Marietta, GA 30066, USA
+1 678-903-4061 | info@boldlighting.us

www.boldlighting.com